

APPLICATION:	
JOB NAME:	
QUANTITY:	ITEM NO.:

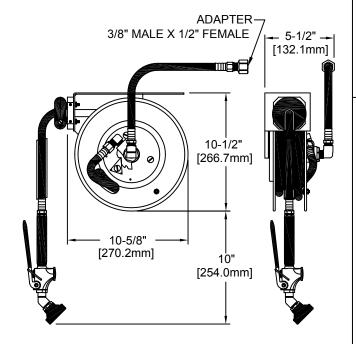

ROUGH-IN: SEE MOUNTING PLATE BELOW



PRODUCT NAME:

# REEL RINSE UNDER COUNTER MOUNT

SPEC.

. 2984 REV. C

☐ \_\_\_\_\_\_ SPECIAL CONFIGURATION
(CHECK BASE MODEL AND OPTIONS)

MODEL:

□ 2984 WITH 12' HOSE

### **OPTIONS OR MODIFICATIONS:**

□ BRUSH

□ OTHER \_\_\_\_\_

### **FEATURES**:

## REEL

- \* SELF LOCKING
- \* EXPOSED

#### HOSE

- \* 12' LENGTH REEL HOSE
- \* 19" LENGTH INLET HOSE
- \* 3-PLY FIBER REINFORCED RUBBER HOSE
- \* ADJUSTABLE BALL STOP

# STANDARD SPRAY VALVE

- \* NOZZLE THREADED INTO VALVE
- \* 2.65 GPM AT 80 PSI
- \* SHOWER SPRAY PATTERN

### SYSTEM LIMITS

- \* TEMP: 40°F MIN. TO 140°F MAX.
- \* PRESSURE 200 PSI MAX. STATIC

### SHIPPING WEIGHT

\* 13.0 LBS

FISHER

FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com