



Foodservice Equipment

Job \_\_\_\_\_ Item# \_\_\_\_\_

## 9451-HP34CDN Insulated Heater / Proofer



**SIZE:**

**E9451-HP34CDN -**

67-9/16" High, 23-5/16" Wide, 33-7/8" Deep  
1716 mm High, 592 mm Wide, 860 mm Deep

**Toastmaster's 9451-HP34CDNF -** In locations where cabinets will be used primarily for holding with infrequent serving applications (gauged by door openings) or in situations with limited start-up budgets, the non-insulated cabinet would satisfy most requirements. In higher volume operations with more frequent serving applications the insulated cabinet would be the better choice as it delivers a faster recovery and greater consistency of temperature.

**CONSTRUCTION:**

- Aluminum construction
- Insulated
- Removable heating console

**CONTROLS:**

- Mechanical controls

**LABORATORY CERTIFICATION AND APPROVAL**




**STANDARD FEATURES:**

- Air baffle and circulation air blower provide even heat distribution
- Aluminum construction
- Set of 5" swivel casters w/brakes
- Polycarbonate door
- Magnetic door gaskets
- Lift-off door
- Full length door handle
- Insulated

**OPTIONAL FEATURES:**

- Solid door

# 9451-HP34CDN Insulated Heater / Proofer

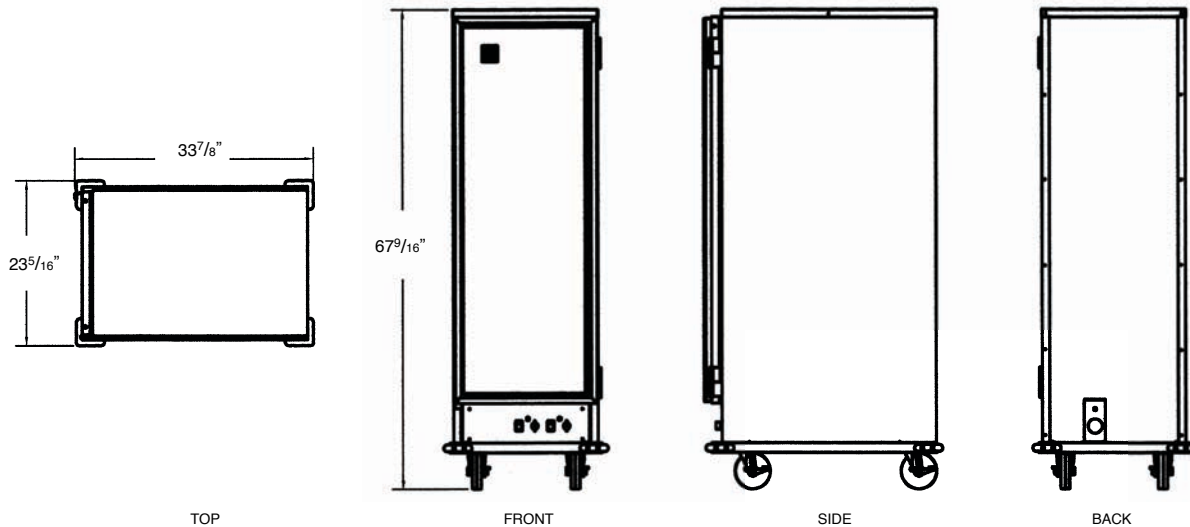

### CAPACITY:

Heater/ Proofer	18"x26" Full Size Sheet Pans	13"x18" Full Size Sheet Pans	Spacing
		34	

### SPECIFICATIONS:

#### SERVICE CONNECTIONS:

- Unit provided with 6 foot detachable cord and plug. NEMA 5-20P
- Removable console consisting of blower, three-way toggle switch, running lights to indicate heater (holding) or proofing mode, stainless steel water reservoir.
- Element controlled by 180 degrees thermostat. 1500 Watts in heating mode. 1500 Watts in proofing mode.

#### DIMENSIONS:

	Height	Width	Depth
<b>Exterior</b>	67-9/16"	23-5/16"	33-7/8"
<b>Interior</b>	51-3/4"	18-1/8"	27-1/2"

#### DOOR SWING:

- Door swings 270 degrees to the recessed side of the cabinet

#### ELECTRICAL:

Amp Draw	120/1	208/3	240/1	240/3
	14	n/a	n/a	n/a

#### PACKING SIZE:

72" High, 28" Wide, 40" Deep  
(1828 mm High, 711 mm Wide, 1016 mm Deep)

#### SHIPPING WEIGHT:

140 Pounds, FOB Menominee, MI 49858

#### LISTINGS:

The 9451-HP34CDN has C-ETL-US and NSF listings.



INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.

TM119/1060



Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.



Toastmaster® 10 Sunnen Dr. St. Louis, MO 63143 • www.toastmastercorp.com  
Toll Free: 1-800-264-7827 • Telephone: 1-314-781-2777 • Toll Free Fax: 1-800-264-6666 • Fax: 314-781-3636